

TEMPERATURE CONTROL

YOU NEED TO CONTROL SAMPLE TEMPERATURE DURING VISCOSITY MEASUREMENTS

Temperature control during viscosity measurement helps insure accurate test results. The addition of a Brookfield circulating water bath is a smart investment. The Brookfield TC Series Circulating Water Baths are uniquely configured for use with your Brookfield Viscometer or Rheometer.

PROGRAMMABLE CONTROLLERS

offer the highest level of performance, flexibility, and control for the most demanding applications.

Full graphic display with help menus

Intuitive, one-touch control

Time and temperature programming with data logging

RS-232 Interface –

Use with Rheocalc™ (p43)

or Rheovision™ (p46) Software

Built-in service reminder

Five speed pump control

DIGITAL CONTROLLERS


have easy-to-use controls. Just dial in your set-point and push a button, you're done!

LED readout displays set point and fluid temperature

3 adjustable temperature pre-sets

Unique rotary control allows rapid set-point adjustments

Two speed pump

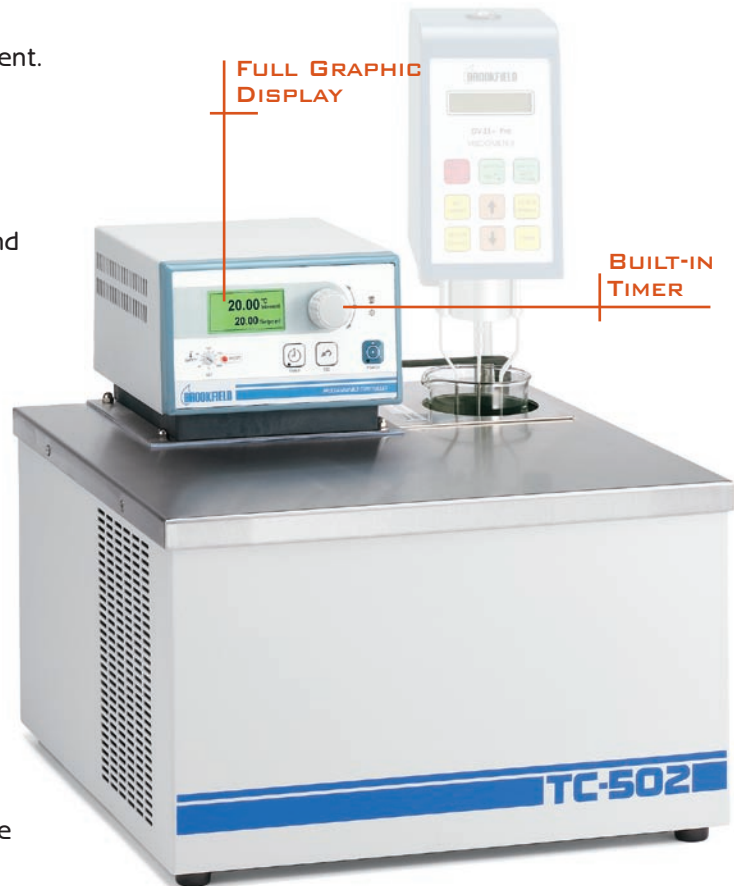

TEMPERATURE BATHS

| MODEL | Temperature Range Low | Temperature Range High | Controller | Cooling | Temperature Stability† | Digital Readout/ Accuracy | Reservoir Capacity | Internal Work Area DxDxH† (inches) | Overall Dimensions DxDxH† (inches) | Weight (Gross) |
|----------|-----------------------|------------------------|--------------|--------------|------------------------|---------------------------|--------------------|------------------------------------|------------------------------------|----------------|
| TC-602P | -20°C | +200°C | Programmable | Refrigerated | 0.01°C | LCD/±.25 | 6.0 liters | 5 1/4 x 5 1/4 x 5 1/2 | 15 3/4 x 8 1/4 x 22 1/2 | 68 lbs |
| TC-602D | -20°C | +150°C | Digital | Refrigerated | 0.05°C | LED/±.5 | 6.0 liters | 5 1/4 x 5 1/4 x 5 1/2 | 15 3/4 x 8 1/4 x 22 1/2 | 64 lbs |
| TC-502P | -20°C | +200°C | Programmable | Refrigerated | 0.01°C | LCD/±.25 | 6.0 liters | 5 1/4 x 5 1/4 x 5 1/2 | 16 1/4 x 15 3/4 x 15 1/2 | 76 lbs |
| TC-502D | -20°C | +150°C | Digital | Refrigerated | 0.05°C | LED/±.5 | 6.0 liters | 5 1/4 x 5 1/4 x 5 1/2 | 16 1/4 x 15 3/4 x 15 1/2 | 76 lbs |
| TC-202P* | -20°C | +150°C | Programmable | Tap Water** | 0.01°C | LCD/±.25 | 10.0 liters | 5 1/4 x 8 1/2 x 7 3/4 | 13 x 14 1/4 x 13 1/4 | 37 lbs |
| TC-202D* | -20°C | +150°C | Digital | Tap Water** | 0.05°C | LED/±.5 | 10.0 liters | 5 1/4 x 8 1/2 x 7 3/4 | 13 x 14 1/4 x 13 1/4 | 37 lbs |
| TC-102P* | -20°C | +200°C | Programmable | Tap Water** | 0.01°C | LCD/±.25 | 6.0 liters | 5 1/4 x 5 1/4 x 5 1/2 | 14 1/2 x 7 1/2 x 13 1/4 | 27 lbs |
| TC-102D* | -20°C | +150°C | Digital | Tap Water** | 0.05°C | LED/±.5 | 6.0 liters | 5 1/4 x 5 1/4 x 5 1/2 | 14 1/2 x 7 1/2 x 13 1/4 | 27 lbs |
| TC-351 | -20°C | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 17 x 14 x 14 | 72 lbs |

* For use at lower temperatures, use the built-in tap water cooling, or use model TC-351 Cooler for control to -20°C. FOR TEMPERATURES HIGHER THAN 80°C, PLEASE CONTACT BROOKFIELD FOR FLUID RECOMMENDATIONS.

Note: 1. Specify voltage and frequency when ordering.

** Tap water connection required. N/A - Not Applicable

† Temperature stability may vary depending on bath volume, surface area, insulation and type of fluid

TC-502

CIRCULATING WATER BATH

REFRIGERATED



FEATURES & BENEFITS

Provides stand-alone operation
– No tap water required

Easy control of set-point

Configured to measure viscosity directly in the bath – accommodates 600 mL beaker

Programmable Controller version is designed to automate sample temperature control

Built-in circulator to pump to external devices



TC-602

CIRCULATING WATER BATH

COMPACT — REFRIGERATED



FEATURES & BENEFITS

Compact — small “footprint” on your lab bench, only 8 1/4 inches wide

Specifically designed for use with water-jacketed devices

- Wells-Brookfield Cone/Plate
- Small Sample Adapter Accessory
- Ultra-Low Adapter Accessory
- R/S-CC Rheometer
- R/S-CP5 Rheometer

Provides stand-alone operation – no tap water is required

Easy control of set-point

Programmable Controller version is designed to automate sample temperature control

T: 800.628.8139 OR 508.946.6200

F: 508.946.6262 WWW.BROOKFIELDENGINEERING.COM

TC-102

CIRCULATING WATER BATH
NON-REFRIGERATED



FEATURES & BENEFITS

- Compact – small “footprint”
- Built-in circulator pump
- Built-in tap water cooling coil
- Perfect choice for use with Brookfield water-jacketed devices
 - Wells-Brookfield Cone/Plate
 - Small Sample Adapter
 - Accessory
 - Ultra-Low Adapter Accessory
 - R/S-CC Rheometer
 - R/S-CPS Rheometer



ENHANCED
DIGITAL
CONTROLLER



WATER BATH ACCESSORIES

**HIGH TEMPERATURE
FLUID** 1 gal.

DC510 50°C to 150°C

DC550 100°C to 200°C

Heat transfer fluids provide superior thermal stability

**LOW TEMPERATURE
FLUID** 1 gal.

Dynalene -50°C to +58°C

Excellent low temperature performance

Little or no evaporation

For continuous low temperature applications

ALGAEICIDE 8 oz.

Keeps circulator baths clean, odor free and resists black algae

Economical

10-15 drops per gallon

ETHYLENE GLYCOL 1 gal.

-20°C to +100°C

Laboratory grade bath fluid

Normally mixed with water at 50:50 ratio

TC-202

CIRCULATING WATER BATH
NON-REFRIGERATED



FEATURES & BENEFITS

- Configured for measuring multiple samples directly in the bath
- Work area accommodates 600 mL and 1000 mL beakers (cover is removable for large sample container requirements)
- Built-in tap water cooling coil
- Built-in circulator pump



TC-351 COOLER NOT SHOWN



FEATURES & BENEFITS

- Eliminates tap water requirements on non-refrigerated baths
- Increases lower range of most baths to -20°C